

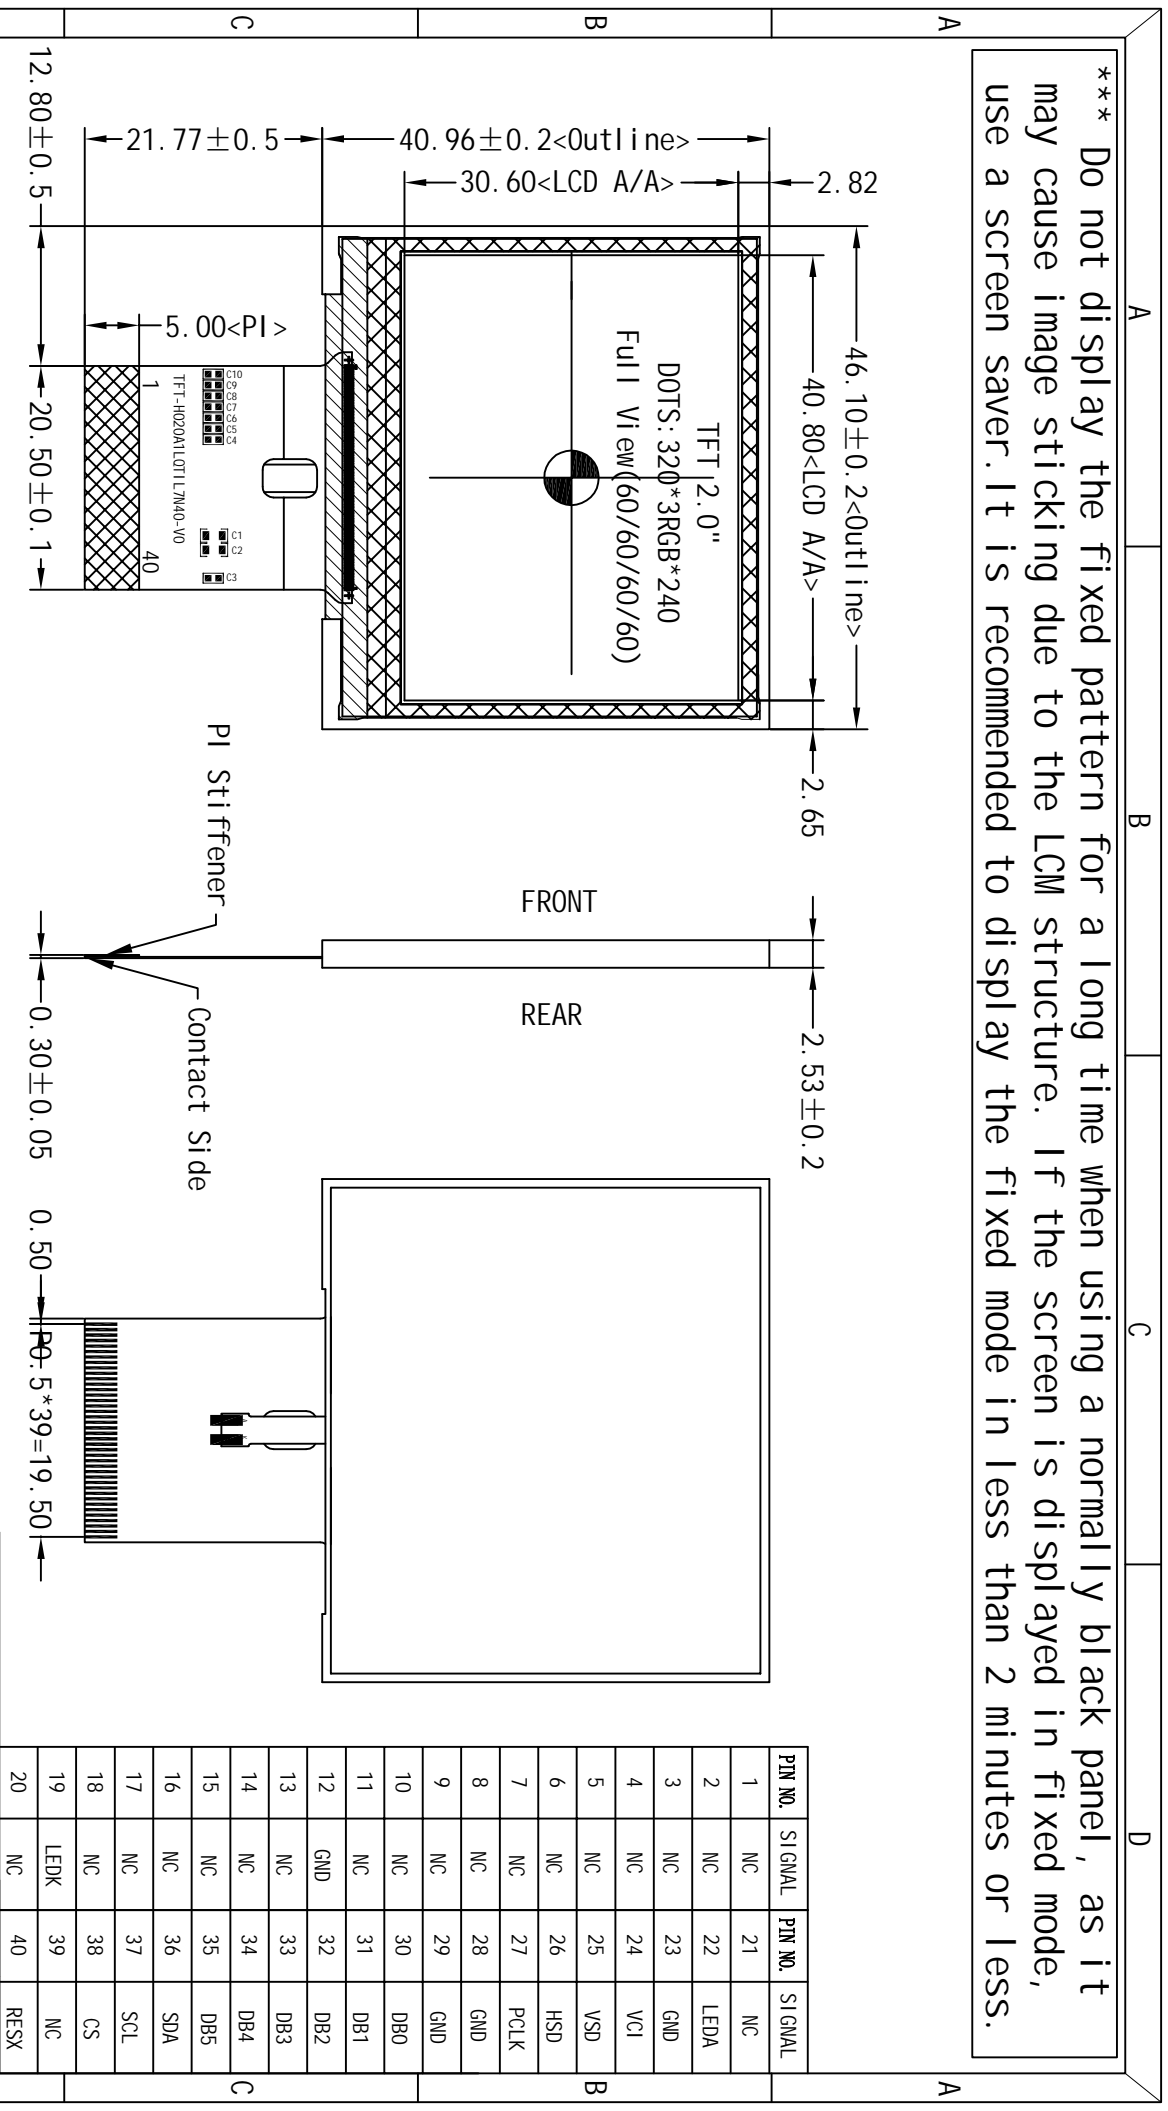


*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

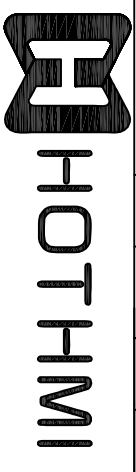

*1. LCD Display Type	TFT, Transmissive, Normally White	*6. Storage Temp	-30° C-80° C
*2. Viewing Direction	Full View (U60/D60/R60/L60)	*7. Driver IC	IL19342C
*3. Interface	SP1-3I+RGB 6-bit	*8. Backlight	WHITE VF=3.2V IF=60mA(Typ)
*4. Operating Voltage	VCI=3.3V (Typ)	*9. LCM Brightness	700 cd/m ² (Typ)
*5. Operating Temp	-20° C-70° C		



Drawing Title:		TFT-H020A1L0T1L7N40-V0	
Scale	Unit	Tolerance	Date
1:1	mm	±0.3	2019-06-25
Ver:	Drawn:	Liu	